



## Imitation Learning Based Obstacle Avoidance for MSL Soccer Robot in Offensive Scenario

Achmad Akmal Fikri\*

<sup>1</sup>Graduate School of Science and Technology, Kumamoto University, Japan

\*Correspondence: E-mail: [akmal@st.cs.kumamoto-u.ac.jp](mailto:akmal@st.cs.kumamoto-u.ac.jp)

### ARTICLE INFO

**Article History:**

Submitted/Received 09 December 2024

First Revised 31 December 2024

Accepted 31 December 2024

First Available Online 31 December 2024

Publication Date 31 December 2024

**Keyword:**

Soccer Robot, Obstacle Avoidance,  
Offensive Scenario, Imitation Learning,  
GAIL.

### ABSTRACT

Kontes Robot Sepak Bola Indonesia Beroda (KRSBI-B), inspired by the Middle-Size League (MSL) of RoboCup, serves as a platform to push advancements in autonomous soccer robots in Indonesia. A key requirement for these robots is the ability to perceive their environment and make independent decisions involving recognizing field features, planning the navigation, and playing offensive and defensive tactics. Among these, obstacle avoidance during offensive play is critical, as robots should dynamically navigate while targeting the goal. In line with the theme "Toward Robot Soccer League 2050," this study focuses on developing robots capable of human-like performance in dynamic and competitive settings. To achieve this, we utilize Generative Adversarial Imitation Learning (GAIL), a method that enables robots to learn adaptive navigation strategies from expert demonstrations. Equipped with an omnidirectional camera, the robot identifies obstacles, field lines, and goal positions, integrating this sensory data into its decision-making framework. The system was tested in four scenarios: no obstacles, one obstacle, two obstacles, and three obstacles, with randomized obstacle positions. Success rates of 100%, 99.5%, 92.5%, and 82.5% were recorded, demonstrating the system's effectiveness in navigating complex environments and its potential to enhance robotic soccer performance.

## 1. INTRODUCTION

Kontes Robot Indonesia (KRI) is a prestigious robotics competition held annually in Indonesia, designed to encourage university students to innovate and solve real-world problems using robotics [1]. Among its various divisions, the Kontes Robot Sepak Bola Indonesia Beroda (KRSBI-B) stands out as a challenging competition that focuses on wheeled soccer robots. KRSBI-B adopts the rules of the RoboCup Middle-Size League (MSL) [2], where fully autonomous wheeled robots compete in soccer matches. By aligning with RoboCup standards, KRSBI-B aims to improve the competitiveness of Indonesian teams on the global level.

Basically, a fundamental aspect of KRSBI-B and RoboCup MSL is the requirement for a fully autonomous system. The robots should independently perceive their environment, plan their movements, and execute both offensive and defensive strategies in real-time without human intervention. Robust sensor integration, effective algorithms, and sophisticated decision-making frameworks are essential for these capabilities. In offensive scenarios, robots should navigate toward the goal while keeping ball possession on a field full of dynamic obstacles, such as opponents and teammates. Because of these challenges, advanced techniques that combine offensive play and obstacle avoidance must be developed.

In recent years, obstacle avoidance research has been widely studied [3][4] using both traditional methods, such as rule-based systems [7]-[9] and path-planning algorithms [10]-[16], and learning-based approaches [17]-[25]. One of MSL Indonesia teams [7] applies a fuzzy logic controller to avoid the collision with the obstacles for catching the ball. Another research [8] implements type-2 fuzzy logic system collaborating with behavior tree for making decisions and avoiding obstacles in SSL robot matches. Our team [9] also proposes an artificial potential field (APF) based on fuzzy logic controller for obstacle avoidance. Another team [11] also designs an obstacle avoidance system by combining an improved dynamic window approach (IDWA) and artificial potential field (APF). Other research also proposes a path-planning approach for avoiding the collision using search-based approach [12]-[14] and sample-based approach [15][16].

Furthermore, recent advances in machine learning, including reinforcement [5] and imitation [6] learning, demonstrates significant promise in this proposal. The research [17] introduces a combination of artificial neural networks (ANNs) and a standardization technique to improve the performance results from the training network. Some example studies of reinforcement learning are utilized with different approaches, such as introducing mobile robot collision avoidance learning (MCAL) based on reinforcement learning integrated with path planning [20] and proposing end-to-end map-based deep reinforcement learning algorithm using dueling double DQN with a prioritized experienced replay [21]. Imitation learning is also commonly chosen for obstacle avoidance purpose, namely developing a local policy based on an egocentric local occupancy map [24] and imitation learning based path planning (ILPP) in dynamic pedestrian environment [25].

On the basis of recent advances in imitation learning, this study proposes a generative adversarial imitation learning (GAIL) based framework [26] relying on image-based virtual range finder with omnidirectional camera for obstacle avoidance to offensive scenarios in wheeled soccer robots. GAIL is a method that trains policies by imitating expert demonstrations without the need for a predefined reward function, setting it apart from traditional reinforcement learning, which relies on manually designed rewards. An image-based virtual range finder also is integrated into the GAIL framework, providing a 360-degree spatial understanding of the environment. This enables the agent to effectively identify obstacles and map state-action pairs, which is essential for navigating dynamic environments and maintaining offensive strategies in wheeled soccer robot scenarios. This work aims to enhance the capabilities of soccer robots in KRSBI Beroda and RoboCup MSL.

## 2. METHODS

### 2.1. Image-Based Virtual Range Finder with Omnidirectional Camera

In robotic soccer, having an effective perception system is essential for robots to navigate in dynamic scenarios while maintaining awareness of their surroundings. Our robots use an omnidirectional camera as its main sensor, providing a full 360-degree field of view. This configuration allows the robots to detect key elements in their environment, including the ball, obstacles, and field lines, enabling it to respond effectively to rapidly changing situations.

---

**Algorithm 1** Image-Based Virtual Range Finder Approach for Obstacle Avoidance

---

```

1: Input: Camera Streaming
2: Output: ranges
3: Function: roi_field(img, vertices)
4:     Create a mask of zeros with the same shape as img
5:     Fill polygon on the mask using vertices
6:     Perform bitwise AND between img and the mask
7:     Return masked_image
8: Function: drawLineRadial(point, x, y, radius)
9:     Initialize empty list pts
10:    Compute angle as 360/point
11:    for i = 0 to point do
12:        Compute coordinates  $xp = x + radius \times \cos((angle \times i)/360 \times 2\pi)$ 
13:        Compute coordinates  $yp = y + radius \times \sin((angle \times i)/360 \times 2\pi)$ 
14:        Append (int(xp), int(yp)) to pts
15:    Return pts
16: Function: radialPoints(angle, x, y, radius)
17:    Compute  $xrp = x + radius \times \cos(angle/360 \times 2\pi)$ 
18:    Compute  $y rp = y + radius \times \sin(angle/360 \times 2\pi)$ 
19:    Store (xrp, yrp) as ptr
20:    Return ptr
21: Main:
22: Capture frame and preprocess it (crop, resize, and convert to HSV)
23: Retrieve HSV thresholds using calibration sliders
24: Generate masks (mask1, mask2) using HSV thresholds
25: Refine masks with erosion and dilation
26: Combine masks into mask region
27: Detect contours in mask region
28: for each contour do
29:     Compute convex hull and append to region field
30: Mask region of interest using roi_field
31: Highlight obstacles in region obstacle
32: Convert region obstacle to grayscale and threshold it to create thresh obs
33: Compute inward radial points ptsIn using drawLineRadial
34: for each radial line do
35:     for each radius step from 0 to max radius do
36:         Compute radial points using radialPoints
37:         if thresh obs at (xrp, yrp) is obstacle then
38:             Append point to ptsOut
39:             Break
40: for each pair of ptsIn and ptsOut do
41:     Draw line on the frame
42:     Compute distance and store it to ranges
43: Return ranges


```

---

In obstacle detection purpose, we propose a range finder approach to search obstacle features from video streaming. The following algorithm describes the implementation of this virtual range finder, detailing the steps involved in generating radial obstacle detection lines using image processing techniques. The method combines region-of-interest masking, HSV-based

segmentation, and contour analysis to accurately determine the location and distance of obstacles relative to the robot.

Based on **Algorithm 1**, the frame from an omnidirectional camera is processed to detect obstacles. It begins by preprocessing the image and creating masks using HSV thresholds, refined with morphological operations. Contours are extracted to identify obstacle regions, which are masked to isolate interest area. Afterwards, a virtual range finder is implemented by drawing radial lines from a central point, detecting obstacles based on pixel values along these lines. Detected points are visualized with lines, and the computed ranges are returned for obstacle avoidance, providing a vision-based solution for spatial awareness and navigation. Finally, the obstacle detection frame can be shown in **Figure 1**.

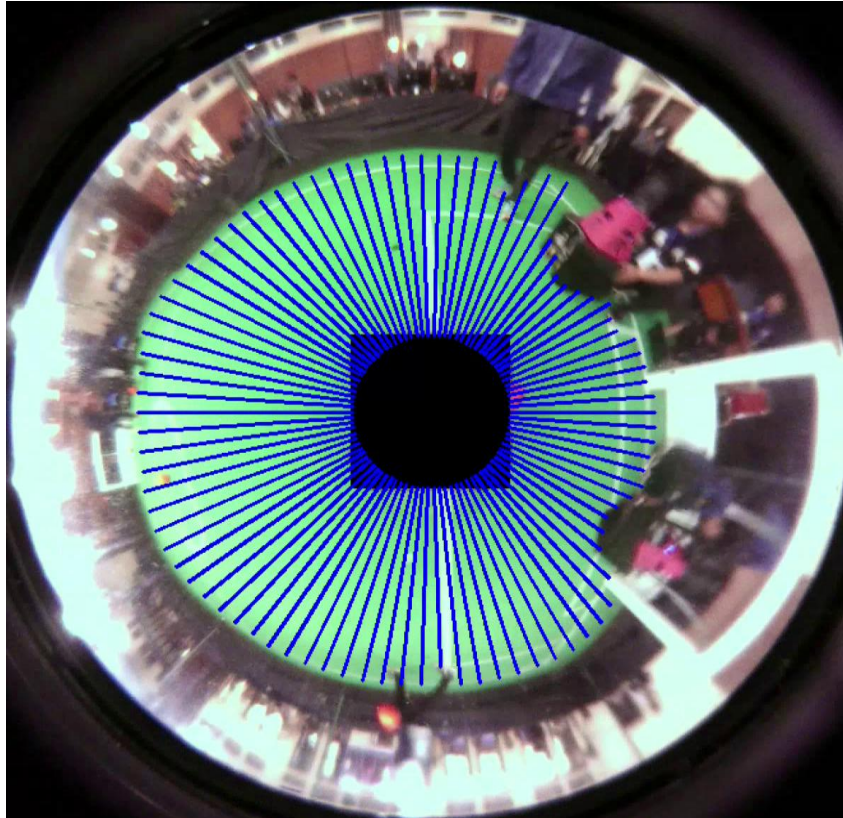


**Figure 1.** Obstacle Detection Visualization.

## 2.2 Generative Adversarial Imitation Learning


Generative Adversarial Imitation Learning (GAIL) [26] is a framework enabling robots to imitate expert behavior by learning policies directly from demonstrations, without requiring explicit reward signals as traditional reinforcement learning. Instead, GAIL infers an implicit reward function from expert trajectories, allowing robots to navigate complex environments and replicate expert strategies. This approach is particularly suited for dynamic tasks as soccer robot. In MSL soccer, obstacle avoidance is crucial for effective navigation in offensive strategy. Robots should adapt to changing environments, avoiding collisions while maintaining offensive positioning. GAIL facilitates this by learning obstacle avoidance and strategic behaviors through expert demonstrations.

The field size used in KRI is 12 x 8 meter divided into two areas, defensive area (ours) and offensive area (opponent). In this scenario, there are three obstacles placed in the offensive area as depicted in **Figure 2**. The objective is how the robot (blue mark) navigates to the opponent's penalty box (red area) without colliding the obstacle before scoring the goal.

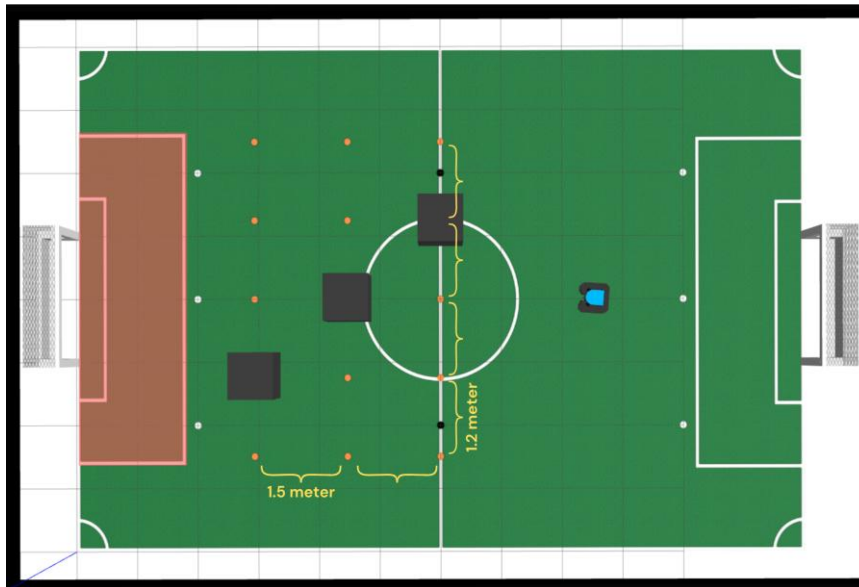

**Figure 2.** Field Visualization.

Based on the problem statement, GAIL employs a generator-discriminator framework to learn policies that mimic expert behavior, as illustrated in the architecture diagram (**Figure 3**). The generator, denoted as  $\pi_{\theta_G}(a_t|s_t)$ , represents the policy model parameterized by  $\theta_G$ . It interacts with the environment (*Env*), generating actions ( $a_t$ ) based on the current state ( $s_t$ ) and producing trajectories. These trajectories are fed into discriminator, represented by  $p(\text{expert}|s, a)$ , for distinguishing generator's trajectories and expert demonstrations.

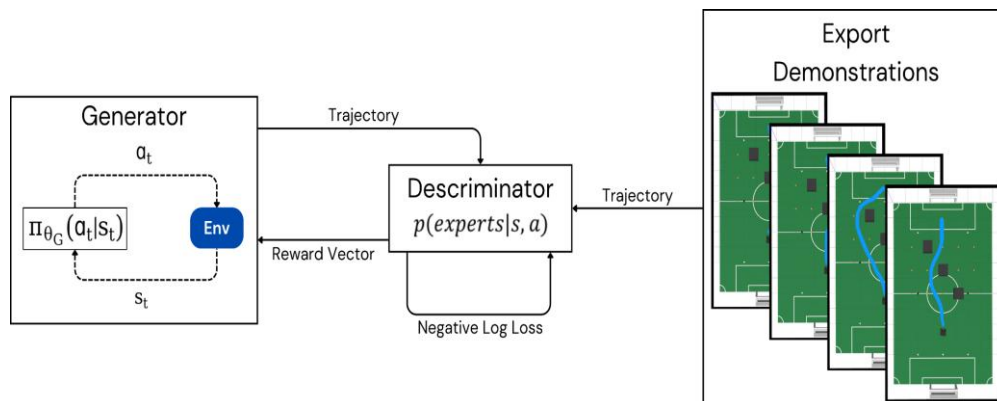


**Figure 3.** GAIL Architecture in this Scenario.

The discriminator outputs a reward, providing feedback to the generator by evaluating the similarity between its trajectories and the expert's. The generator updates its policy by minimizing the discriminator's negative log-loss, improving its ability to mimic expert trajectories. Meanwhile, the discriminator is trained to maximize its accuracy in classifying expert ( $s, a$ ) pairs and generated ( $s, a$ ) pairs. Through this adversarial process, the generator gradually learns to produce trajectories similar to expert demonstrations, achieving expert-level behavior without explicit reward functions.


The neural network architecture in **Figure 5** is designed to facilitate robot navigation in a soccer field, directly correlating with the problem representation illustrated in **Figure 4**. **Figure 1** highlights the goal area in red and depicts key inputs to the network: actions ( $V_x, V_y, \omega_z$ ), the robot's current state derived from 20 image-based virtual omnidirectional range finders, and

the relative position  $(\Delta x, \Delta y)$  between the robot and the goal area. These inputs enable spatial awareness, obstacle detection, and goal-directed navigation.

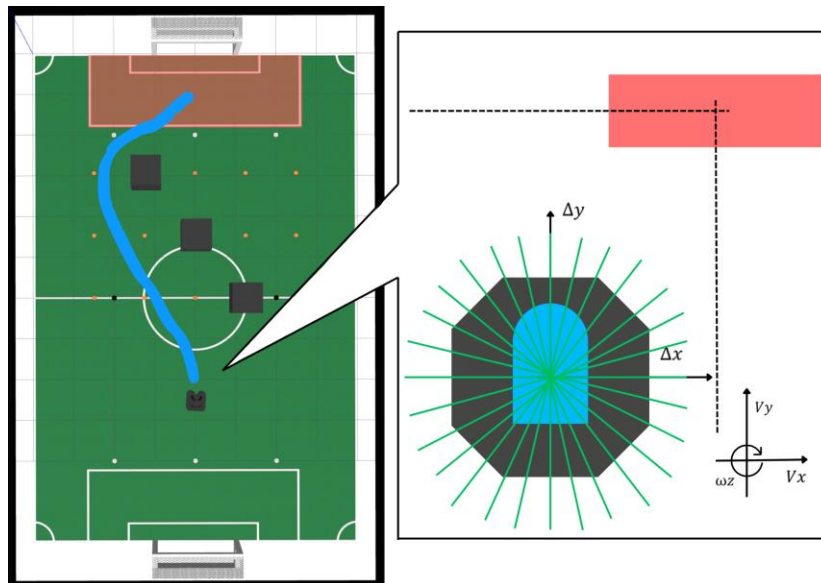

**Figure 4.** Problem Statement Representation: Environment, Action, and Current State

As shown in **Figure 5**, the network's input layer consists of 25 neurons categorized into three components: current velocities  $(V_{(x,y)}, \omega_{(z)})$ , radial distances from the virtual range finders  $(S_{(1-20)})$ , and the relative position to the goal  $(P_{(x,y)})$ . Two hidden layers process these inputs, extracting patterns for obstacle avoidance and goal navigation. The output layer generates motion commands, where  $Va_{(x,y)}$  defines linear velocity and  $\omega a_{(z)}$  specifies angular velocity, guiding the robot to the goal area in **Figure 4** while avoiding obstacles dynamically and efficiently.

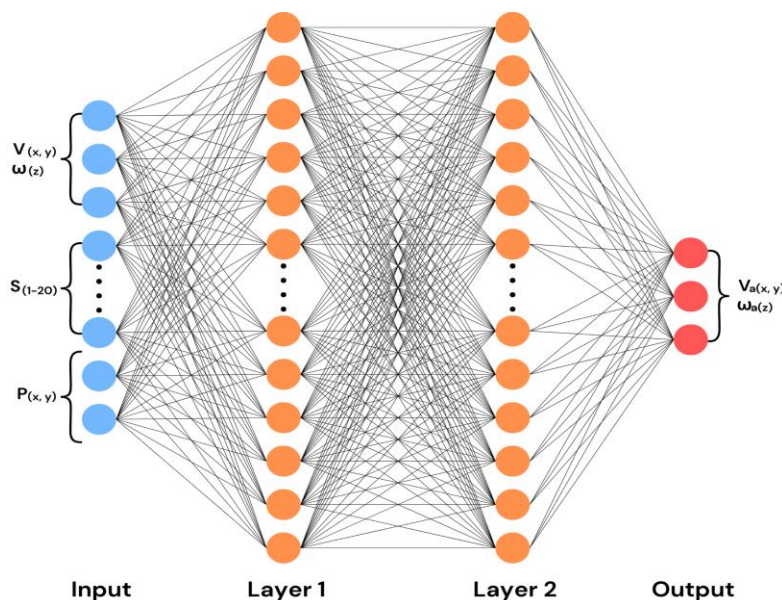

**Figure 5.** Neural Network Architecture.

## 2.3 Evaluation

### 2.3.1 Success Rate

The success rate is a key evaluation metric used to measure the robot's performance in achieving its offensive scenarios. This metric is calculated as the ratio of successful trials to

the total trial number, expressed as a percentage. A trial is successful if the robot reaches the goal within a defined area while avoiding obstacles.


$$SR = \left( \frac{\text{Number of Successful Trials}}{\text{Total Number of Trials}} \right) \times 100 \quad (1)$$

The success rate, calculated as successful trials over total trials, is tested across scenarios of varying obstacle placement. This metric reflects the robot's reliability and effectiveness in obstacle avoidance, with higher rates indicating better navigation performance.

### 3. EXPERIMENT

#### 3.1. Experimental Setup

In this experiment, the robot was simulated on the Gazebo as a world simulation. As visualized in **Figure 6**, the robot's design utilized was an omnidirectional robot with 4-wheels configuration based on real robot's design with an omnidirectional camera as a main sensor. As a reference, we executed the simulation on a laptop, installed Ubuntu OS 22.04 LTS and ROS2, that was equipped with an intel core i7-14650H CPU, NVIDIA GeForce RTX 4060 laptop GPU, and 16GB of RAM.

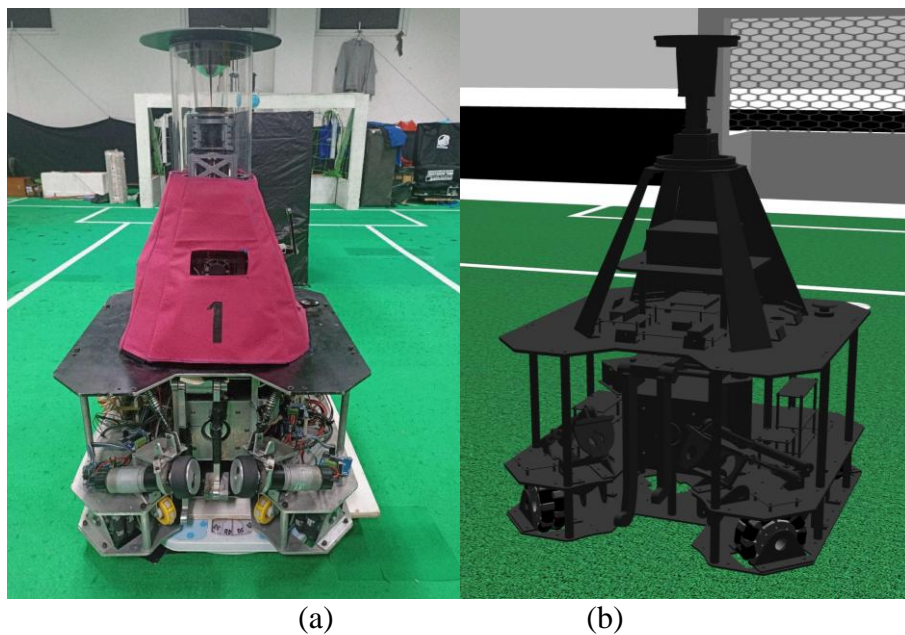

**Figure 6.** Robot Visualization: (a) Real Robot, (b) Gazebo Simulation.

#### 3.2. Data Collection

User control data was collected using a joystick on the Gazebo simulator. The user operated the soccer robot to reach the goal area while avoiding obstacles. As illustrated in Figure 2, three obstacles were selected from 15 possible positions, marked as orange points. This process was repeated for 100 episodes, with obstacle positions shuffled randomly within each row to ensure diverse expert demonstrations, improving the learning effectiveness.


#### 3.3. Train Results

The training experiment was performed using an omnidirectional soccer robot in a simulated virtual environment using Gazebo. As shown in Figure 4, an image-based 360-degree virtual range finder was used on top center. Additionally, each training episode, the three cube obstacles were placed randomly in each row. The settings of each hyperparameter in imitation learning are shown in **Table 1**.

**Table 1.** Hyperparameter Settings

Hyperparameter	Value
Maximum Steps	70000
Batch Size	256
Learning Rate	0.00003
Weight Decay	5.0
Number of Layers	2
Hidden Units	512
Input Dropout	0.6
Dropout	0.75
Activation	ReLU

The **Figure 7** showed training performance over time, with initial significant fluctuations in rewards, including sharp dips, as the model explores suboptimal policies. Over time, rewards improved and stabilized, indicating successful learning and convergence to an effective strategy, although occasional dips might result from exploration of new strategies or challenging scenarios.

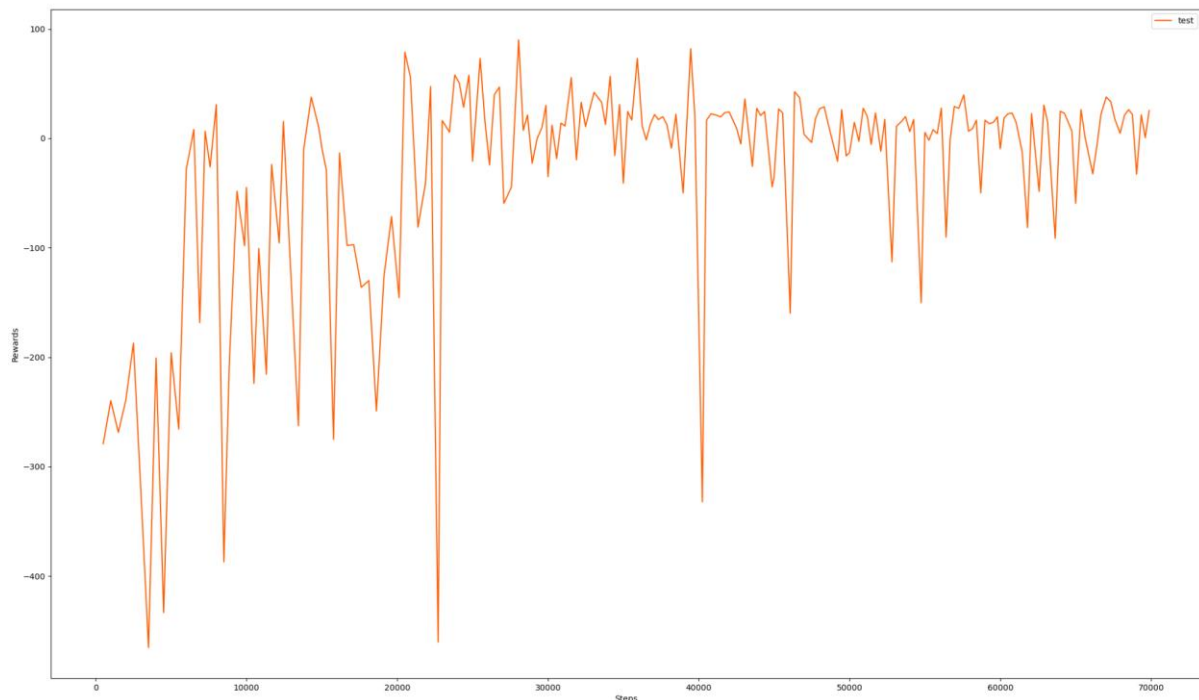**Figure 7.** Obstacle Detection Visualization.

### 3.4. Test Results

To evaluate the performance of the trained model, we conducted tests across four different scenarios: no obstacles, one obstacle, two obstacles, and three obstacles. Each scenario was designed to assess the robot's ability to navigate toward the goal area while avoiding collisions with obstacles.




- **No Obstacle:** The robot navigates freely, serving as the baseline.
- **One Obstacle:** A single obstacle was placed in the first row, shuffled randomly per trial.
- **Two Obstacles:** Obstacles were placed in the first and second rows, with positions shuffled within their rows.
- **Three Obstacles:** Obstacles were placed in the first, second, and third rows, with random shuffling in each row for every trial.

For each scenario, we conducted 200 trials to ensure statistical significance. A trial was deemed successful if the robot reached the goal area without colliding with any obstacles. The success rate for each scenario was then calculated as the percentage of successful trials out of the total trials. The results are as shown in **Table 2**.

**Table 2.** Results of Each Scenario

	Without Obstacle	With One Obstacle	With Two Obstacles	With Three Obstacles
Success Rate	100	99.5	92.5	82.5

These results demonstrate the robot's capability to navigate effectively under varying levels of environmental complexity. As the number of obstacles increases, the success rate decreases, indicating the challenge posed by more dynamic and cluttered environments.

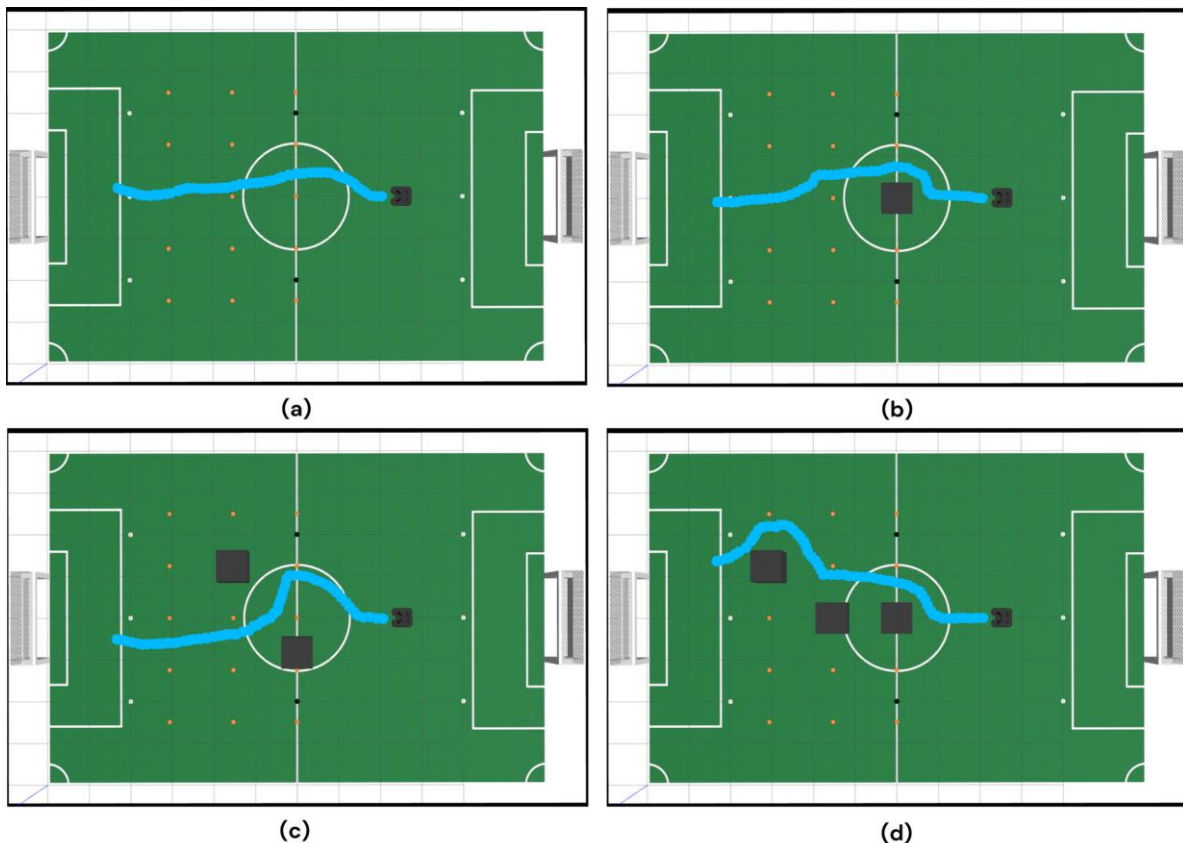

**Figure 8.** Sample Trajectories: (a) No Obstacle, (b) One Obstacles, (c) Two Obstacles, (d) Three Obstacles

Additionally, we provide a sample trajectories plot (**Figure 8**) for each scenario, illustrating the robot's path as it approaches the goal area while avoiding obstacles. These trajectories highlight the model's ability to generate efficient and collision-free paths.

#### 4. CONCLUSION

This study implements Generative Adversarial Imitation Learning (GAIL) to teach MSL soccer robots obstacle avoidance in offensive scenarios. Using expert demonstrations, the robot learned effective navigation policies, achieving a 100% success rate without obstacles and 82.5% with three randomly placed obstacles. The results demonstrate GAIL's capability to handle dynamic environments and ensure efficient, collision-free trajectories.

This study highlights the potential of GAIL in advancing robotic soccer navigation and imitation learning applications. For the future work, complex obstacle setups, dynamic opponents, and multi-agent strategies to further enhance performance can be explored more.

#### 5. ACKNOWLEDGMENT

We would like to thank the Graduate School of Science and Technology, Kumamoto University, Japan, for providing data for this study.

#### 6. AUTHORS' NOTE

The authors declare that there is no conflict of interest regarding the publication of this article. The authors confirmed that the paper was free of plagiarism.

#### 7. AUTHORS' CONTRIBUTION/ROLE

Achmad Akmal Fikri : Conceptualization, Methodology, Formal Analysis, Writing Original Draft, Investigation;

#### 8. REFERENCES

- [1] KRI Technical Committee, "Pedoman Kontes Robot Indonesia (KRI) 2024," *Pusat Prestasi Nasional, Kemendikbudristek, Indonesia*, 2024. [Online]. Available: <https://kontesrobotindonesia.id/data/2024/BukuPedomanKRI2024.pdf>
- [2] MSL Technical Committee, "Middle Size Robot League: Rules and regulations for 2024," *Version 25.1*, 2024. [Online]. Available: [https://msl.robocup.org/wp-content/uploads/2024/05/Rulebook\\_MSL2024\\_v25.1.pdf](https://msl.robocup.org/wp-content/uploads/2024/05/Rulebook_MSL2024_v25.1.pdf).
- [3] A. Pandey, S. Pandey, and D. R. Parhi, "Mobile robot navigation and obstacle avoidance: A review," *Int. Robot. Autom. J.*, vol. 2, no. 3, pp. 96–105, 2017.
- [4] K. Katona, H. A. Neamah, and P. Korondi, "Obstacle avoidance and path planning methods for autonomous mobile robot navigation," *Sensors*, vol. 24, no. 11, p. 3573, 2024.
- [5] H. Le, S. Saeedvand, and C. C. Hsu, "Comprehensive review of mobile robot navigation using deep reinforcement learning in crowded environments," *J. Intell. Robot. Syst.*, vol. 110, p. 158, 2024.
- [6] A. Hussein, M. M. Gaber, E. Elyan, and C. Jayne, "Imitation learning: A survey of methods," *ACM Computing Surveys*, vol. 50, no. 2, article 21, April 2018.
- [7] N. Rinanto, I. Marzuqi, A. Khumaidi, and S. T. Sarena, "Obstacle Avoidance using Fuzzy Logic Controller on Wheeled Soccer Robot", *J. Ilm. Tek. Elektro Komput. Dan Inform*, vol. 5, no. 1, pp. 26–35, Jul. 2019.
- [8] R. H. Abiyev et al., "Decision making and obstacle avoidance for soccer robots," in *10th Int. Conf. Theory and Application of Soft Computing, Computing with Words and Perceptions (ICSCCW-2019)*, Springer, 2020, pp. 455–462.
- [9] F. I. Firmansyah, M. S. Zuhrie, M. Rohman, E. Endryansyah, and M. Aulia, "Sistem

- Obstacle Avoidance Pada Omnidirectional Mobile Robot Dengan Metode Artificial Potential Field (APF) Berbasis Fuzzy Logic Controller (FLC)", *JTE*, vol. 12, no. 2, pp. 6–13, Jul. 2023.
- [10] A. N. A. Rafai, N. Adzhar, and N. I. Jaini, "A Review on Path Planning and Obstacle Avoidance Algorithms for Autonomous Mobile Robots," *Journal of Robotics*, vol. 2022, article 2538220, 14 pages, 2022.
- [11] S.-A. Li, L.-H. Chou, T.-H. Chang, C.-H. Yang, and Y.-C. Chang, "Obstacle avoidance of mobile robot based on HyperOmni vision," *Sensors and Materials*, vol. 31, no. 3, pp. 1021–1036, 2019.
- [12] H. Natori, K. Tokuyama, and M. Mukai, "Obstacle avoidance path generation for mobile robots using varying search range," *Artificial Life and Robotics*, vol. 24, no. 3, pp. 285–290, Sep. 2019.
- [13] N. Adiuku, N. P. Avdelidis, G. Tang, A. Plastropoulos, and Y. Diallo, "Mobile robot obstacle detection and avoidance with NAV-YOLO," *International Journal of Mechanical Engineering and Robotics Research*, vol. 13, no. 2, pp. 219–226, 2024.
- [14] Y. Cao and N. Mohamad Nor, "Improved dynamic window approach for dynamic obstacle avoidance in mobile robot formation," *Decision Analytics Journal*, vol. 11, p. 100471, 2024.
- [15] J. Zhang, T. Zhang, Y. Niu, Y. Guo, J. Xia, Y. Qiu, Z. Yuan, and Y. Yang, "Simulation and implementation of robot obstacle avoidance algorithm on ROS," *Journal of Physics: Conference Series*, vol. 2203, no. 1, p. 012010, Feb. 2022.
- [16] J. Ye, N. Kang, B. Guan, S. Cai, T. Zhang, and Y. Yang, "Application of robot obstacle avoidance algorithm and attack strategy on ROS," *Journal of Physics: Conference Series*, vol. 2456, no. 1, p. 012007, Mar. 2023.
- [17] K. K. A. Farag, H. H. Shehata, and H. M. El-Batsh, "Mobile robot obstacle avoidance based on neural network with a standardization technique," *Journal of Robotics*, vol. 2021, Article ID 1129872, pp. 1–14, 2021.
- [18] T. Ribeiro, F. Gonçalves, I. Garcia, G. Lopes, and A. F. Ribeiro, "Q-Learning for autonomous mobile robot obstacle avoidance," *2019 IEEE International Conference on Autonomous Robot Systems and Competitions (ICARSC)*, Porto, Portugal, 2019, pp. 1–7.
- [19] S. Xiaoxian, Y. Chenpeng, Z. Haoran, L. Chengju, and C. Qijun, "Obstacle avoidance algorithm for mobile robot based on deep reinforcement learning in dynamic environments," *2020 IEEE 16th International Conference on Control & Automation (ICCA)*, Singapore, 2020, pp. 366–372.
- [20] J. Choi, G. Lee, and C. Lee, "Reinforcement learning-based dynamic obstacle avoidance and integration of path planning," *Intelligent Service Robotics*, vol. 14, no. 5, pp. 663–677, Nov. 2021.
- [21] G. Chen, L. Pan, Y. Chen, P. Xu, Z. Wang, P. Wu, J. Ji, and X. Chen, "Deep Reinforcement Learning of Map-Based Obstacle Avoidance for Mobile Robot Navigation," *SN Computer Science*, vol. 2, no. 6, pp. 1–14, Nov. 2021.
- [22] L. Guan, Y. Lu, Z. He, and X. Chen, "Intelligent Obstacle Avoidance Algorithm for Mobile Robots in Uncertain Environment," *Journal of Robotics*, vol. 2022, Article ID 8954060, 9 pages, 2022.
- [23] L. D. Hanh and V. D. Cong, "Path Following and Avoiding Obstacle for Mobile Robot Under Dynamic Environments Using Reinforcement Learning," *Journal of Robotics and Control (JRC)*, vol. 4, no. 2, pp. 157–164, 2023.
- [24] Y. Liu, A. Xu and Z. Chen, "Map-based Deep Imitation Learning for Obstacle Avoidance," *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, Madrid, Spain, 2018, pp. 8644-8649.
- [25] L. Qin, Z. Huang, C. Zhang, H. Guo, M. Ang and D. Rus, "Deep Imitation Learning for

- Autonomous Navigation in Dynamic Pedestrian Environments," *2021 IEEE International Conference on Robotics and Automation (ICRA)*, Xi'an, China, 2021, pp. 4108-4115.
- [26] J. Ho and S. Ermon, "Generative adversarial imitation learning," in *Proceedings of the 30th International Conference on Neural Information Processing Systems (NIPS'16)*, Barcelona, Spain, 2016, pp. 4572–4580.